

Web Browsing the Copier by it's *IP Address*

# Auto E-mail Notification



Will bring up the "*Web Image Monitor*"



Click on the *Login button*



User Name is: *admin*  
[There is no password]

- Click on the *Login Button*


[This guide is taken from a MPC2050 Colour M/c – variations across ranges will occur]

[Login Home page]

Click on the “**CONFIGURATION**” Button

Click on the “**E-MAIL**” Button

When done Click on the “**OK**” button, then go to **Network** [configuration panel]

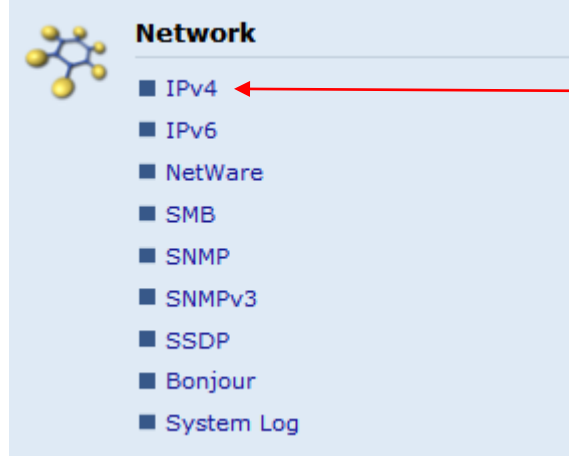

Click on the “IPv4” button

IPv4 : Active

**Ethernet**

Host Name : RNP12520D

DHCP :  Active  Inactive

Domain Name :  Auto-Obtain (DHCP)  Specify

IPv4 Address \* : 192.168.0.44 (192.168.0.156)

Subnet Mask \* : 0.0.0.0 (255.255.255.0)

DDNS :  Active  Inactive

WINS :  Active  Inactive

Primary WINS Server \* : 0.0.0.0 (0.0.0.0)

Secondary WINS Server \* : 0.0.0.0 (0.0.0.0)

Scope ID \* : ()

**Details**

Default Gateway Address \* : 0.0.0.0 (192.168.0.150)

DNS Server :  Auto-Obtain (DHCP)  Specify

Auto-Obtain (DHCP)

DNS Server1(DHCP) : 192.168.0.150

DNS Server2(DHCP) : 0.0.0.0

DNS Server3 : 0.0.0.0 The parameter setting will be updated only when [Auto-Obtain (DHCP)] is clicked.

Specify

DNS Server1 : 0.0.0.0 The parameter setting will be updated only when [Specify] is clicked.

DNS Server2 : 0.0.0.0

DNS Server3 : 0.0.0.0

Turn off DHCP for a Static IP address  
Obtain Domain name by DHCP Or Specify  
Enter “**Domain name**” if used.

Enter “**IP address**”  
Enter “**Subnet Mask address**”

Enter the “**Gateway IP Address**”

When static IP is selected DNS Auto-Obtain will switch to Specify

Enter the “**DNS Server IP address**”

When done click “OK”.

**RICOH Aficio MP C2800** Web Image Monitor Logout Administrator

**Configuration** Refresh

**Select Auto E-mail Notification**

**Device Settings**

- System
- Paper
- Date/Time
- Timer
- Logs
- Download Logs
- E-mail
- Auto E-mail Notification**
- On-demand E-mail Notification
- File Transfer
- User Authentication Management
- Administrator Authentication Management
- Program/Change Administrator
- LDAP Server
- Firmware Update
- Program/Change Realm

**Network**

- IPv4
- IPv6
- NetWare
- AppleTalk
- SMB
- SNMP
- SNMPv3
- SSDP
- Bonjour
- System Log

**Security**

- Network Security
- Access Control
- IPP Authentication
- SSL/TLS

**RICOH Aficio MP C2800** Web Image Monitor Logout Administrator

**Auto E-mail Notification** Refresh

OK Cancel

Notification Message :

**Groups to Notify** Under Groups to Notify Select "Edit"

Group 1 :	Name : Group-1	<input type="button" value="Edit"/>
	Address List : <tony>xxxxxxxx@xxxxxxx.co.uk	
Group 2 :	Name : Group-2	<input type="button" value="Edit"/>
	Address List : <input type="text"/>	
Group 3 :	Name : Group-3	<input type="button" value="Edit"/>
	Address List : <input type="text"/>	
Group 4 :	Name : Group-4	<input type="button" value="Edit"/>
	Address List : <input type="text"/>	

**RICOH Aficio MP C2800** Web Image Monitor Logout Administrator

**Group 1** ?

OK Cancel

Name : Group-1

E-mail Language : English

Subject : mpc 2800 2nd floor Copier location

Message :

Notify Address :

Name: tony Name: contact

Address: xxxxxxxx@xxxxxxx.co.uk Address: e-mail address of contact


Click "ADD"

Current Addresses:

<tony>xxxxxxxx@xxxxxxx.co.uk


Then click "OK"

OK Cancel

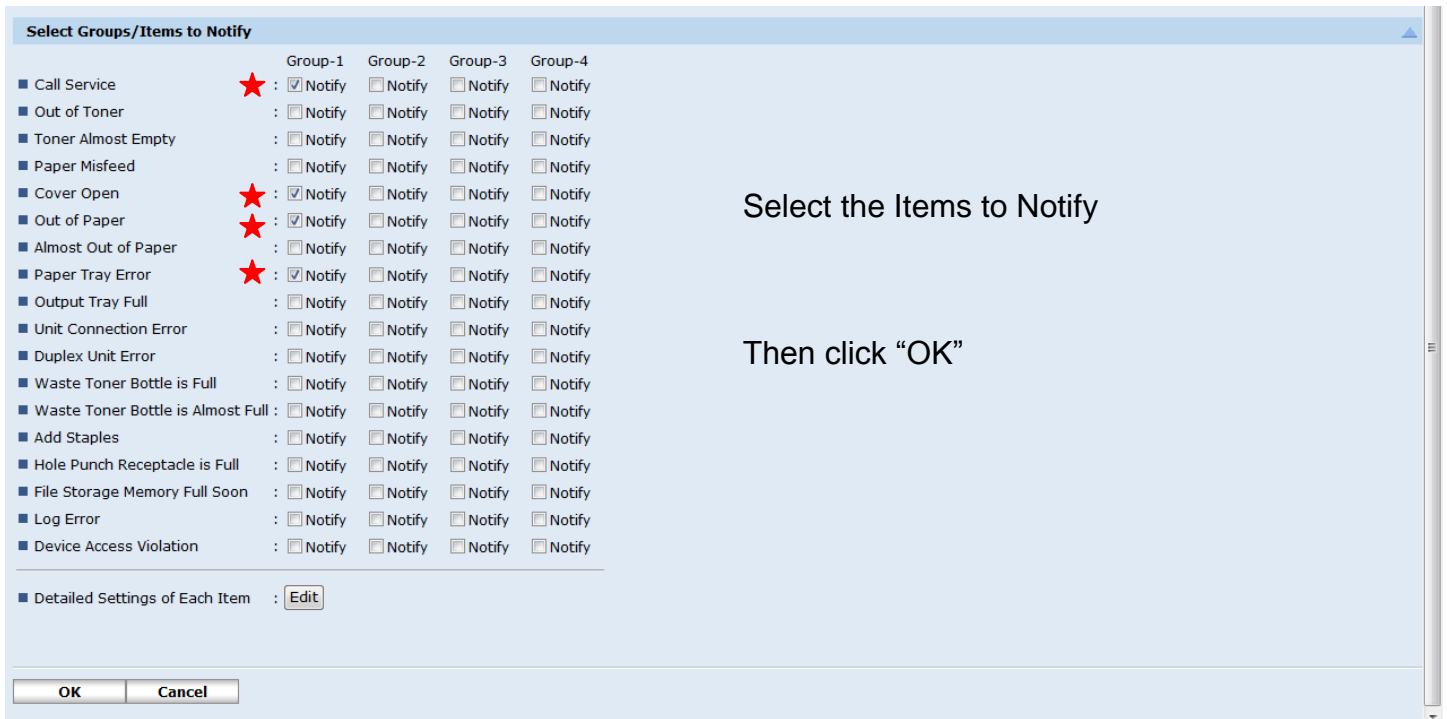

Select the Items to Notify

Then click "OK"

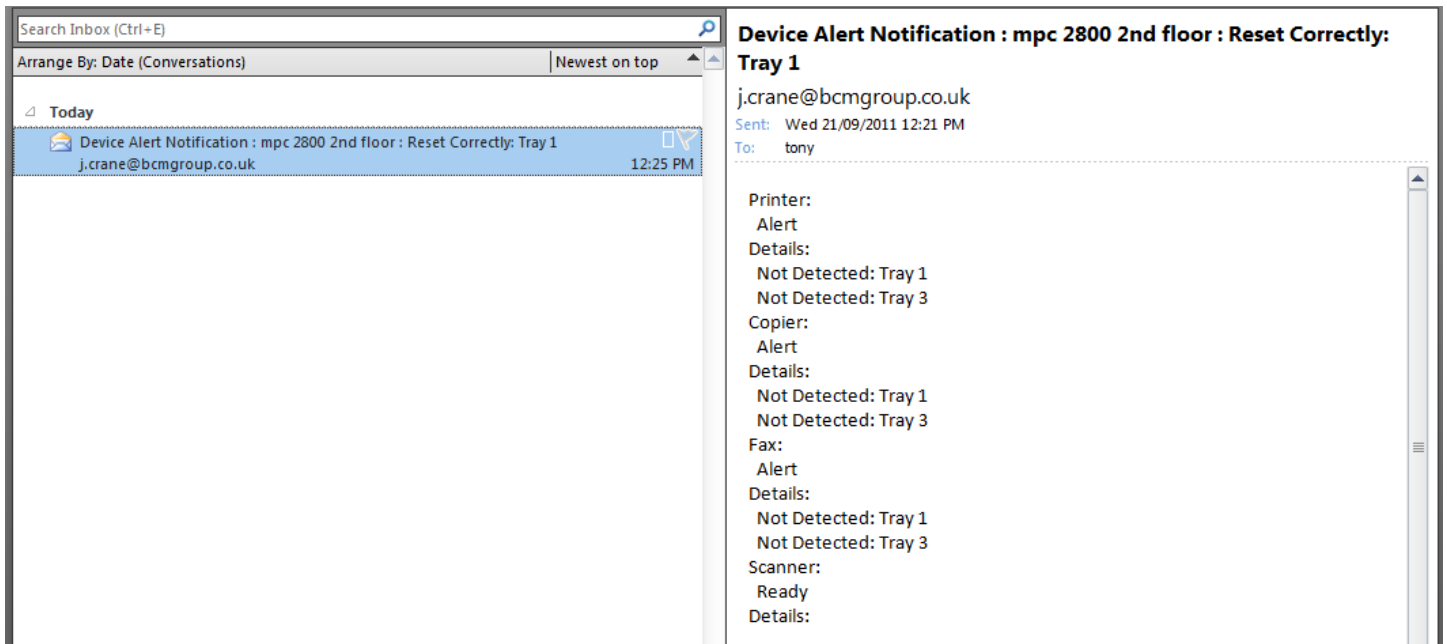

Open your E-Mail service and the Notification Message will look similar to this.